

Axpert Ultra Off-Grid Inverter



- Dual outputs for smart load management
- Two independent AC power sources connected and switched automatically
- Built-in current transformer sensor to meet self-consumption application
- Support external BTS (Battery Temperature Sensor) detection
- Built-in power status lighting indicators
- Built-in 2.8" colored LCD with slide operation
- Built-in Wi-Fi for mobile monitoring and OTA firmware upgrade
- Supports USB On-the-Go function
- Reserved communication port for BMS (RS485, CAN-BUS or RS232)
- Support optional GFCI, Rapid shutdown, AFCI detections
- Parallel operation with 6 units

Axpert Ultra Off-Grid Inverter Selection Guide

MODEL	Axpert Ultra 8K	Axpert Ultra 11K
RATED POWER	8000VA/8000W	11000VA/11000W
PARALLEL CAPABILITY	YES, 6 units	
INPUT		
Voltage	230 VAC	
Selectable Voltage Range	170-280 VAC (For Personal Computers) 90-280 VAC (For Home Appliances)	
Frequency Range	50 Hz/60 Hz (Auto sensing)	
OUTPUT		
AC Voltage Regulation (Batt. Mode)	230VAC ± 5%	
Surge Power	16000VA	22000VA
Efficiency (Peak)	93%	
Transfer Time	10 ms (For Personal Computers) ; 20 ms (For Home Appliances)	
Waveform	Pure sine wave	
BATTERY		
Battery Voltage	48 VDC	
Floating Charge Voltage	54 VDC	
Overcharge Protection	63 VDC	
SOLAR CHARGER & AC CHARGER		
Solar Charger Type	MPPT	
Maximum PV Array Power	10000W (5000W x 2)	12000W (6000W x 2)
MPPT Range @ Operating Voltage	90 ~ 450 VDC	
Maximum PV Array Open Circuit Voltage	500 VDC	
Maximum PV Input Current	27A x 2 (MAX 40A)	
Maximum Solar Charge Current	150A	150A
Maximum AC Charge Current	120A	150A
Maximum Charge Current	150A	150A
PHYSICAL		
Dimension, D x W x H (mm)	145 x 438 x 553.6	
Net Weight (kgs)	18.4	
Communication Interface	USB/RS232/RS485/WiFi/Dry-contact/BTS Support optional GFCI, Rapid shutdown, AFCI detection	
External Current Sensor Port	Yes, built-in current transformer sensor	
OPERATING ENVIRONMENT		
Humidity	5% to 95% Relative Humidity(Non-condensing)	
Operating Temperature	-10°C to 50°C	
Storage Temperature	-15°C to 60°C	
STANDARD		
Compliance Safety	CE	

Product specifications are subject to change without further notice.



High Power Output
Low LCOE



Maximum Power
515W+



TWMNH

N-type Half-cell
Bifacial Module (54)

54HD495-515W




en.tongwei.com.cn



Learn More

DRAWINGS (Unit: mm)

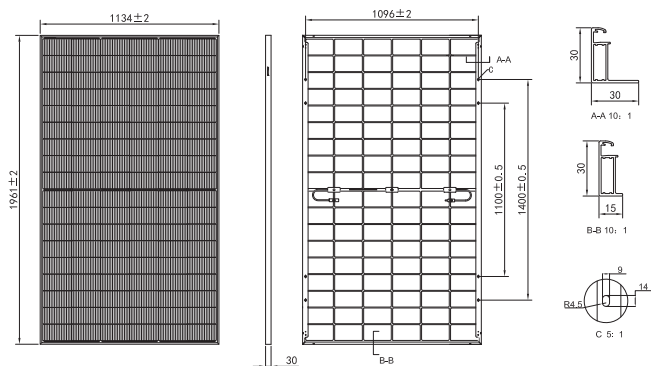

MECHANICAL PARAMETERS

Cell Type	TNC (N Type Monocrystalline Cell)
Cell Orientation	108[6×18]
Dimensions	1961±2×1134±2×30mm
Weight	27.4 kg
Front Glass	2.0mm AR coated heat strengthened glass
Rear Glass	2.0mm heat strengthened glass
Frame	Anodized aluminum alloy frame
Junction Box	IP68, 3 diodes
Cable	4.0mm ²
Cable length	±1200mm, length can be customized
Wind/Snow load	2400Pa/5400Pa
Packaging	36pcs per pallet, 864pcs per 40'HC

ELECTRICAL CHARACTERISTICS (STC)

Module Type: TWMNH-54HDXXX

Maximum Power: Pmax [W]	495	500	505	510	515
Open Circuit Voltage: Voc [V]	39.88	40.06	40.24	40.42	40.60
Short Circuit Current: Isc [A]	15.86	15.89	15.92	15.95	15.98
Voltage at Maximum Power: Vmp [V]	33.45	33.70	33.94	34.19	34.43
Current at Maximum Power: Imp [A]	14.80	14.84	14.88	14.92	14.96
Module Efficiency: η [%]	22.3	22.5	22.7	22.9	23.2

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass1.5

ELECTRICAL CHARACTERISTICS (NMOT)

Maximum Power: Pmax [W]	374	378	381	385	389
Open Circuit Voltage: Voc [V]	37.97	38.14	38.31	38.48	38.65
Short Circuit Current: Isc [A]	12.80	12.83	12.85	12.88	12.90
Voltage at Maximum Power: Vmp [V]	31.30	31.56	31.73	31.96	32.21
Current at Maximum Power: Imp [A]	11.95	11.98	12.01	12.05	12.08

* NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass1.5, Wind Speed 1m/s

Electrical characteristics with different rear side power gain

5%	Maximum Power: Pmax [W]	519	525	530	535	540
	Module Efficiency: η [%]	23.3	23.6	23.8	24.1	24.3
15%	Maximum Power: Pmax [W]	569	575	580	586	592
	Module Efficiency: η [%]	25.6	25.9	26.1	26.4	26.6
25%	Maximum Power: Pmax [W]	618	625	631	637	643
	Module Efficiency: η [%]	27.8	28.1	28.4	28.6	28.9


TEMPERATURE RATING

Temperature Coefficient of Pmax	-0.28%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	+0.046%/°C
NMOT	45±2°C


OPERATING PARAMETERS

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A
Power Output Tolerance	0~+3%

WARRANTY

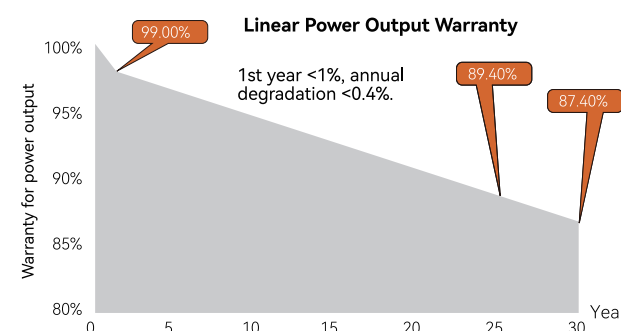

I-V CURVE

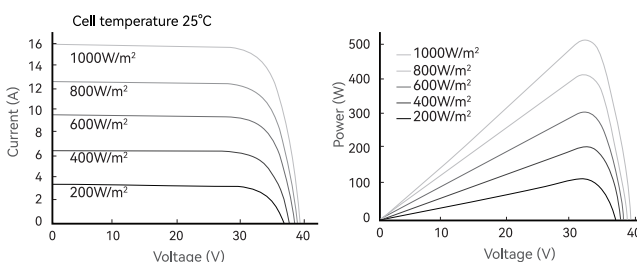

CERTIFICATIONS

Quality Management System and Product Certification

- ISO 9001: 2015/Quality management system
- ISO 14001: 2015/Environmental management system
- ISO 45001: 2018/Occupation health safety management system
- ISO 50001: 2018/Energy management system
- IEC 62941: 2019/Quality system for PV module manufacturing
- IEC 61215/61730, IEC 62804(PID), IEC 61701(Salt), IEC 62716 (Ammonia), IEC 60068-2-68(Sand)



A48100

This 4.8kWh LFP module supports both floor-standing and wall-mounted installations. It is equipped with OTA function for remote upgrade and monitoring.

Up to 30 modules in parallel, it can meet various needs of users and enable flexible expansion.



APP Monitoring (optional)
Real-time monitoring
& Remote upgrade available



Module Design
Flexible expansion



Various Mounting Methods
Wall-mounted,
floor-standing and stacked



High Safety LFP
Cell level monitoring and balancing



Wide Compatibility
Matching with leading inverters

Technical Specifications

Model	A48100
Battery Type	LiFePO4
Nominal Battery Energy	4.8kWh
Nominal Capacity	100Ah
Nominal Voltage	48V
Operating Voltage	42 ~ 54V
Recommended Charge & Discharge C Rate	0.5C
Recommended Charge/Discharge Current	50A
Max Continuous Charge/Discharge Current	75A
Peak Power Charge/Discharge Current	100A (15s)
Depth of Discharge (DOD)	90%
Net Weight	45kg
Dimension[W*D*H]	504*597*155 mm
Charging Temp. Range	0~55°C
Discharging Temp. Range	-20~55°C
Communication	CAN/RS485/RS232
Cycle Life ^[1]	≥6000 Cycles
Protection Level	IP20
Expansion	Up to 30 units in parallel
Pros	Can be used in both off-grid and hybrid setups, compact design
Certification & Safety Standard	UN38.3/CE-EMC/IEC62619/IEC60730/CEI-021/GOST-R/UKCA
Compatible Inverters	SMA/Victron/Ingeteam/Delios/Goodwe/Solis /Deye/SAJ/Voltronic/Sungrow etc.

[1]Test conditions: 0.2C Charging/Discharging, @25°C, 90% DOD