

V-TAC

Meaningful Innovation.

Portable Power Station 300W



- ⊙ Upgrade to LiFePO4 battery capacity 288Wh, 10 outlets
- ⊙ 1 x DC head 7909 input charging port: adapter charging (24V/2.5A), car charging (12V), solar charging (12-24V 120W MAX)
- ⊙ 2 x DC head 5521 output port and 1 x automobile auxiliary power outlet(total 12V/8A)
- ⊙ Speed charger QC 3.0 Output x 2, TYPE-C : Output PD18W X1, TYPE-C : Output PD65W
- ⊙ 1 x EU / BS standard AC ports
- ⊙ LED Flashlight with SOS
- ⊙ Quiet noise level during operation
- ⊙ Over-current, Over-voltage , over-temperature and Short Circuit Protections 9, Cycle life: 2000 Cycles

V-TAC.EU | VTACEXPORTS.COM



LISTING DETAILS

Model: **VT-303N**
 SKU Code: **EU-Plug -11625 | BS-Plug -11740**
 EAN Code: **EU-Plug- 3800170200074**
BS-Plug -3800170203266

MASTER BOX PACKAGING

Qty: **1pc/box**
 Net Weight : **4.3 kgs**
 Product Size : **W*H*L 249*171.5*208mm**

GENERAL DATA


BATTERY	Battery capacity	LiFePO4(IRF32135 19.2V 15Ah/288Wh)	
	Cell model	IRF32135	
DC/INPUT	DC 7909 INPUT	12-20V 120W max Charger	Parallel input
	XT60 Solar Charger	12-24V 120W max Charger	
USB/OUTPUT	USB1 Output	18W 5V3.5A	
	USB2 Output	QC 3.0 18W 5V3A/9V2A/12V1.5A	
	TYPE-C 1 Output	PD18W ,5V3A/9V2A/12V1.5A	
	TYPE-C2 Output	PD65W ,5V3A / 9V3A / 12V3A / 15V3A / 20V3.25A	
DC OUTPUT	DC 1 Output	12V/8A	100W shared
	DC 2 Output	12V/8A	
	Auxiliary Power Outlet	12V/8A	
AC OUTPUT	AC Output 1	AC Power Output 230V Sine WAVE 300W PEAK 500W	
	Output Frequency max	Sine WAVE 300W PEAK 500W	
	Frequency	50Hz	
WIRELESS CHARGER	DC	15W 5V 3A	
LED LIGHTING	Power	3W	
	Mode	High-Light/Low-light/SOS/Flash	

15W Wireless charger



V-TAC

Meaningful Innovation.

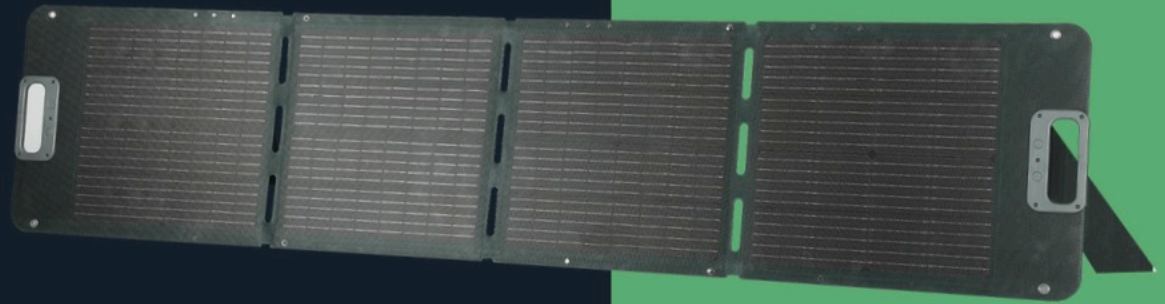

120W Folding Solar Panels

2 IN 1 INSTALLATION



HANGING
SUITABLE FOR
HANGING ANYWHERE
AND RELEASING SPACE



KICKSTANDS
MAKE THE PANEL
MORE EFFICIENT AT
ABSORBING ENERGY

02 YEAR
WARRANTY

UK CA CE RoHS (PSE)

V-TAC

Meaningful Innovation.

Folding Solar Panels

LISTING DETAILS

Model No: **VT-10120**
SKU Code: **11446**
EAN Code: **3800157692267**

MASTER BOX PACKAGING

Qty Per Pallet: **500 pcs**
Gross Weight: **6.3KG±0.5KG**
Folded Size: **430**540*54mm±5mm**
Expanded Size: **1930*430*25±5mm**

GENERAL DATA

Standard Working Power	120W(-5%,+10%)
Standard working Voltage	17.6V
Standard Working Current	6.36A
Open Circuit Voltage Voc (@STC)	21.2V
Short Circuit Current Isc(@STC)	6.83A

OUTPUT SOLAR CHARGER BOX

DC 5521 Working Power	120W(-5%,+10%)
DC 5521 Working Voltage	19.3V(-5%,+10%)
Typc-C	5V/3A,9V/3A,12V/3A,15V/3A,17.6V/2.25A. 45W
USB-A	5V/2.4V
USB-A(QC3.0)	5V/3A,9V/2A,12V1.5A 18W

Folding method: 1 * 4 fold



Easy to Carry



MC4 Charging Cable

Compatible with Portable Power Stations



300W



500W



1000W



2000W