








STELLAR

1N+ Dual-Glass Module
635W-660W

Technical Features:

-  Partial Shading Optimisation
-  Better Temperature Coefficient
-  High Temperature Restriction
-  Micro-crack Resistance
-  Higher Power
-  Lower BOS
-  More Aesthetic Values



reddot winner 2023



Product Warranty
(Extendable to 25years*)



Performance
Warranty





660W
Output

24.4%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

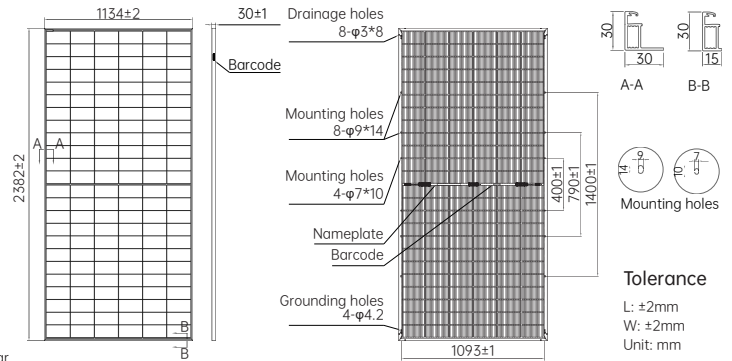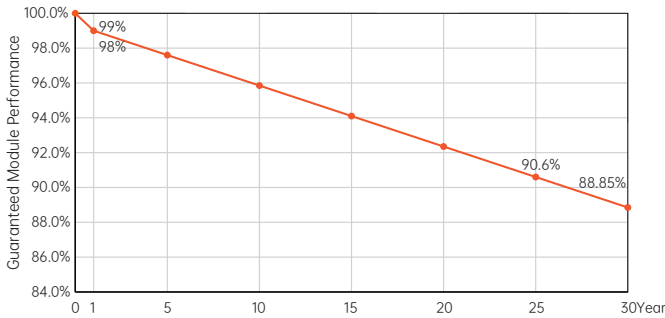

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s) Power Tolerance: 0~ + 3%

Module Type	AIKO-G635-MCH72Dw		AIKO-G640-MCH72Dw		AIKO-G645-MCH72Dw		AIKO-G650-MCH72Dw		AIKO-G655-MCH72Dw		AIKO-G660-MCH72Dw	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P _{max} [W]	635	481	640	485	645	489	650	493	655	496	660	500
V _{oc} [V]	54.70	50.95	53.80	51.04	53.90	51.14	54.00	51.23	54.10	51.33	54.20	51.42
V _{mp} [V]	45.00	42.69	45.10	42.79	45.20	42.88	45.30	42.98	45.40	43.07	45.50	43.17
I _{sc} [A]	14.88	12.02	14.94	12.07	15.00	12.12	15.06	12.17	15.12	12.22	15.18	12.27
I _{mp} [A]	14.12	11.29	14.20	11.35	14.27	11.41	14.35	11.48	14.43	11.54	14.51	11.60
Module Efficiency	23.5%		23.7%		23.9%		24.1%		24.2%		24.4%	

Mechanical Specification

Bifacial Factor	70±5%
Cell Type	N-Type ABC
Glass	Dual glass, 2.0 + 2.0mm Heat Strengthened Glass
Frame	Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) +350mm, -280mm/±1400mm or Customized Length
No. of Cells	144(6*24)
Junction Box	IP68, 3 bypass diodes
Connector	MC4 Compatible/MC4-Evo2
Weight	33.5kg±3%
Dimension	2382*1134*30mm
Package Detail	36pcs per pallet / 144pcs per 20'GP / 720pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +85°C
Maximum Series Fuse Rating	30A
Protection Class	Class II
V _{oc} and I _{sc} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	35 mm diameter hail at 27.2 m/s
Fire Rating	IEC Class C



www.aikosolar.com
marketing@aikosolar.com

*AIKO reserves right to update the specification without notice
DSDr_EN_2405_V1.5

PowerBrick

The DYNESS battery PowerBrick module is widely used in energy storage sector. It adopts modular design and can be used for residential applications. The reliable LiFePO4 technology ensures maximum safety and a longer life cycle.



Compared to the previous generation, the size is reduced by 24%, and the capacity increases by 40%



Continuous discharge current 200A, maximum continuous discharge power 10kW



Fire Protection System: Optional Aerosol fire extinguisher



Unlimited Cycles / 10 Years



Maximum can be expanded to 716.8kWh(no HUB)

Technical Specifications

Model	PowerBrick
Battery Type	LiFePO4
Nominal Battery Energy	14.336kWh
Nominal Voltage/Capacity	51.2V/280Ah
Recommended Charge/Discharge Current	140A (0.5C)
Max. Charge Current	200A
Max. Discharge Current	200A
Depth of Discharge	95%
Communication	CAN/RS485
Cycle Life ^[1]	Unlimited cycles / 10 Years
Protection Level	IP20
Net Weight	114Kg
Dimension [W*D*H]	435*233*857mm (No wall -mounted bracket)
Maximum Parallel Modules	50
Charging Temp. Range	0 ~ 55°C
Discharging Temp. Range	-20 ~ 55°C
WIFI Module	Built-in WIFI module; APP OTA function
Fire Protection System	Optional Aerosol fire extinguisher
Certification & Safety Standard	UN38.3; CE
Compatible Inverters	SMA/Victron/ngeteam/Delios/Goodwe/Solis /Deye/SAJ/Voltronic/Sungrow etc

[1]Test conditions: 0.2C Charging/Discharging, @25°C, 95% DOD

ECO HYBRID

Single-Phase

SNA 12K

- 2 MPPTs with 4 strings, Max. 24kW PV input
- Max. charging and discharging current: 250A
- Off-grid application for high demand with 12kW output power
- Dual AC output ports for multiple load connections
- Separate GEN port
 - Up to 19.2kW Gen/AC coupling input
 - Auto generator start and stop control
- Integrated Design with Load and Battery Breaker
- PV or AC or Generator wake up battery



Specification

INPUT (PV DC)		SNA 12K
Max. PV array power (W)		24000 (12000/12000)
Rated PV input voltage (V)		320
Number of independent MPPT inputs		2/(2:2)
PV input voltage range (V)		100-480
MPPT voltage range (V)		120-385
Start-up voltage (V)		100
Max. PV input current per MPPT (A)		35/35
Max. PV short-circuit current input per MPPT (A)		44/44
Battery		
Compatible battery type		Lithium-ion/Lead-Acid
Rated battery voltage (V)		48/51.2
Battery voltage range (V)		46.4-60/38.4-60
Max. charging / discharging current (A)		250
Max. charging / discharging power (W)		12000
Force wake up battery from PV and Grid function		YES
Grid		
Rated AC voltage (V)		230
Acceptable Input Voltage Range (V)		90~280
Rated AC frequency (Hz)		60/50
Rated AC input current (A)		100
Rated AC input power (W)		24000
PF		0.99
THDI		<5%
Max. continuous AC passthrough current(A)		100
UPS		
Rated output power (W)		12000
Rated output voltage (V)		230
Rated output current (A)		50
Rated output frequency (Hz)		50/60
Surge power, duration		2Pn, 5s
Switching time (UPS)		<10ms@Single and Parallel
Wave form		Sine wave
THDV		3%
GEN		
Acceptable input voltage range		230
Max. AC input voltage (V)		280
Max. AC input current (A)		63
Rated input frequency		50Hz/60Hz (Auto detection)
Transfer time		<10ms@Single; <20ms@Parallel
THDV		<3%
Overload protection		5s@≥150% load /10s@110%~150% load
Efficiency		
Max. efficiency		93.5%
Max. charging / discharging efficiency		93.0%
Max. MPPT efficiency		99.0%
Protection		
PV reverse polarity protection(Y/N)		YES
Over current / voltage protection(Y/N)		YES
AC Short-circuit current protection(Y/N)		YES
Grid monitoring(Y/N)		YES
DC switch(Y/N)		YES
DC / AC Surge protection Type III		YES
Battery reverse polarity protection(Y/N)		YES
General		
Dimensions (W*H*D mm)		530*830*150mm(17.72*25.59*5.9inch)
Weight		40kg/88.2lbs
Ingress protection rating		IP20
Operating environment temperature range(°C)		0~45
Storage temperature range(°C)		-15~60
Relative humidity		5% ~ 95%
Display & Communication interface		LCD+RGB, RS485 / Wifi / CAN
Warranty		2 years
Cooling method		Smart cooling
Topology on AC / Battery side		Transformer-less / Transformer
Altitude (m)		<2000
Noise emission (typical)		<50dB
Standard & Certification		
CE		